

Series 26

Technical Data


Overall Length	33,00 mm
Minimum Centre Spacing	3,18 mm
Maximum Travel	6,35 mm
Working Travel	4,20 mm
Temperature Range from	-55°C
Up to	+120°C
Typical Resistance	15 mΩ
Current Load rated/max.	4,0 / 5,0 A

Materials

Plunger	Cu-alloy, gold plated
Barrel	Cu-alloy, gold plated
Spring	Music wire, gold plated

The Series 26 includes the previously available 262 series types.

Series 26

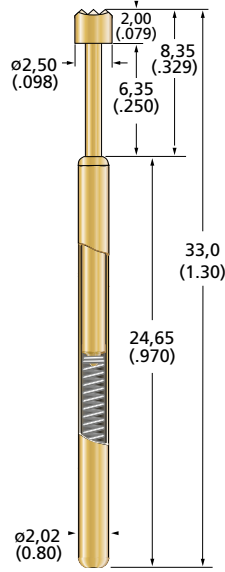

Spring Force (xx)

Preload	Rated Force	Code
0,4 N	1,2 N	12
0,6 N	1,8 N	18
0,8 N	2,5 N	25
1,5 N	4,4 N	44

	Ø 0,70	26.02.07H500.xx
	Ø 1,70	26.02.17.xx
	Ø 1,70	26.03.17.xx
	Ø 2,50	26.03.25.xx
	Ø 1,70	26.04.17.xx
	Ø 2,50	26.04.25.xx
	Ø 1,70	26.05.17.xx
	Ø 2,50	26.05.25.xx
	Ø 2,00	26.06.20.xx
	Ø 1,70	26.08.17.xx
	Ø 2,50	26.08.25.xx
	Ø 1,20	26.08.12Z300T250.xx
	Ø 2,50	26.15.25.xx
	Ø 3,00	26.20.30.xx
	Ø 4,00	26.20.40.xx




For XXLonglife-Nanocoating order as 26X

In the series 26, we offer you even more head shapes. For an overview of all available versions download the data sheet from the Internet at www.fixtest.de.


S 26.00-C

Open Crimp End

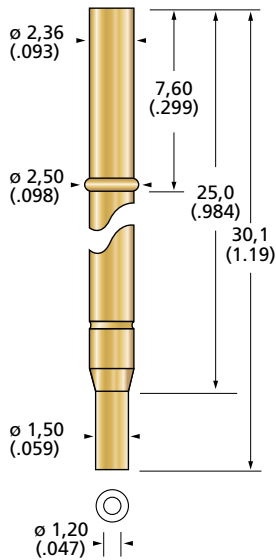



S 26.00-L

Solder Cup

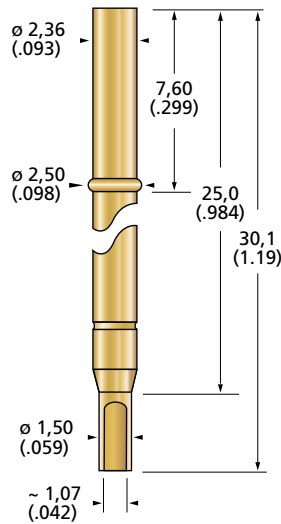

S 26.00-W

Wire-Wrap-Post

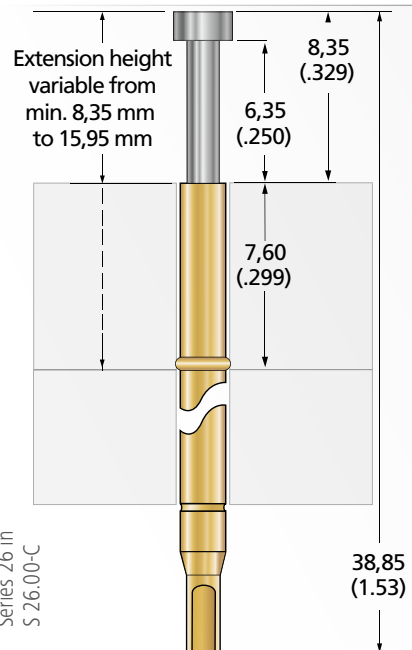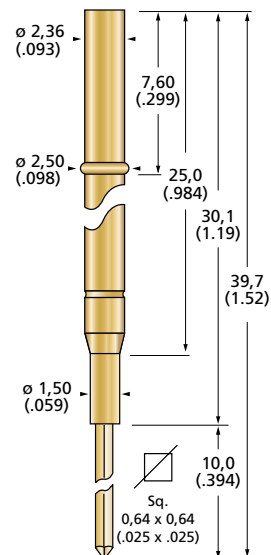

FIXTURING EXAMPLE