



BERNSTEIN Float Switches

Contactless level control

Process safety has its limits

BERNSTEIN makes them manageable



Technical processes are becoming more and more autonomous – and therefore require more stringent monitoring. The efficient interaction between sensors, actuators and control systems is an important prerequisite for automated processes.

The level of liquid media is an important reference variable in many applications and it is therefore essential that it is monitored effectively. Examples include fuel and water level measurement in commercial vehicles, level monitoring while transporting liquids, measuring milk yield in agricultural applications or monitoring water levels in water treatment facilities. In addition, liquid levels are also subject to constant monitoring in many other branches of industry such as air conditioning and ventilation technology, printing and chemical process engineering.

BERNSTEIN has been actively involved in safe liquid level monitoring technology since the mid 1970s and has been continuously setting innovative standards in float switch systems.

Decisively shaping the switch and sensor market, BERNSTEIN is an experienced provider of durable and efficient switching elements.

Today we therefore offer a progressive and complete range of float switches featuring versatile combination options.

99.9% reliability can be very little

Even the millionth BERNSTEIN contact is safe



Reliability knows no compromises. This promise is reliably kept by non-wearing BERNSTEIN float switches. The float with integrated magnet adapts to the liquid level and activates the reed contact enclosed in the immersion tube on reaching a defined level.

Featuring contactless operation and a service life of several million switching cycles, the design is as reliable as it is simple.

Depending on pressure, temperature and aggressivity of the medium to be monitored, the right float can be chosen for specific applications.

Float switches with one or several reed contacts are also available.

100 % BERNSTEIN

- **Efficient**
 - Easy and quick to install
 - Maintenance-free and non-wearing
 - cost-effective modular design
- **Reliable**
 - Straightforward design
 - Several million switching cycles
- **Adaptable**
 - Several switching points/floats available
 - Floating contacts that work in de-energised state
 - Quasi-analogue output possible
 - Temperature sensor combinations

Every application is different

And there is always an ideal solution



Depending on the branch of industry and application liquids have different viscosities, temperatures and pressures. Also the chemical properties of alkaline and acid solutions play an important role in selecting the right float switch.

We are able to provide the best solution for all applications. In addition to float switches with reed contact technology we also have available other systems to suit specific applications:

- Capacitive level sensors
- Optical sensors
- Ultrasonic sensors

BERNSTEIN float switches are used in the following sectors:

- **Commercial/municipal vehicles**
Fuel gauging,
Water level monitoring
- **Process technology**
Level monitoring of chemical substances,
Ink level monitoring in printing machines,
Fire extinguisher filling
- **Water / environment / climate**
Monitoring systems in water and sewage
treatment installations
- **Food technology**
Milk yield measurement, level monitoring of
transported food products and tank installations

Individuality at no extra cost

Easy-to-configure solutions with BERNSTEIN








The BERNSTEIN modular system makes it possible to create various combinations and configurations from standard components. This saves time and money in installation, project planning and stockkeeping.

Reed contacts can be used as normally closed or normally open contacts for measuring when media overshoot or undershoot defined levels. There are also no restrictions in configuring different types of connections with various immersion tube/float combinations. Different levels can be reliably monitored with only one float switch and several reed contacts. There are also no limits to the variations in terms of connected load, switching function and type of connection head.

With BERNSTEIN individual solutions can be configured from standard components – at no extra cost and as from batch size 1.

BERNSTEIN advantages





- Modular system
- 3D component library
- Customised versions
- Short delivery times
- Tested quality
- Application service
- Hotline

Standard float switches					
Mechanical connection	R3/8"	PG9	Flange ø 75	Oval flange	Flange ø 78
Material Connection head	Stainless steel Brass PVC	Stainless steel Brass PVC	PC	PC	Aluminium
Material Tube Ø 12 mm Max. length	Stainless steel 2 m Brass 2 m PVC 1 m	Stainless steel 2 m Brass 2 m PVC 1 m	Stainless steel 2 m Brass 2 m PVC 1 m	Stainless steel 2 m Brass 2 m PVC 1 m	Stainless steel 2 m Brass 2 m PVC 1 m
Electrical connection	PVC cable SIL cable	PVC cable SIL cable	Connector DIN 43650	Connector DIN 43650	Connection terminals
Switching contact	NC contact NO contact Changeover contact	NC contact NO contact Changeover contact	NC contact NO contact Changeover contact	NC contact NO contact Changeover contact	NC contact NO contact Changeover contact
Maximum number of contacts	NC contact 3 NO contact 3 Changeover contact 3	NC contact 3 NO contact 3 Changeover contact 3	NC contact 2 NO contact 2 Changeover contact 1	NC contact 2 NO contact 2 Changeover contact 1	NC contact 3 NO contact 3 Changeover contact 3
Switching power	0.5 A 30 VA 1.0 A 60 VA	0.5 A 30 VA 1.0 A 60 VA	0.5 A 30 VA 1.0 A 60 VA	0.5 A 30 VA 1.0 A 60 VA	0.5 A 30 VA 1.0 A 60 VA

Floats				
Material Dimensions	POM ø 40 x 27 mm	PP ø 30 x 44 mm	NBR ø 30 x 44 mm	PVC ø 42 x 44 mm

Further options	<ul style="list-style-type: none"> Elbow versions (except MS versions and 1", 1.5" and 2") Separate contacts Switching point limited by adjustment rings Versions with several floats Integrated PT100 / PT1000 Heat resistant versions
------------------------	---



See catalogue or go to www.bernstein.eu for enquiries and level switch order form.






			
Flange ø 120	R 1"	R 1,5"	R 2"
Aluminium	Stainless steel PVC	Stainless steel PVC	Stainless steel PVC
Stainless steel 2 m Brass 2 m	Stainless steel 2 m PVC 1 m	Stainless steel 2 m PVC 1 m	Stainless steel 2 m PVC 1 m
Connection terminals	Terminal enclosure	Terminal enclosure	Terminal enclosure
NC contact NO contact Changeover contact	NC contact NO contact Changeover contact	NC contact NO contact Changeover contact	NC contact NO contact Changeover contact
NC contact 3 NO contact 3 Changeover contact 3	NC contact 3 NO contact 3 Changeover contact 3	NC contact 3 NO contact 3 Changeover contact 3	NC contact 3 NO contact 3 Changeover contact 3
0.5 A 30 VA 1.0 A 60 VA	0.5 A 30 VA 1.0 A 60 VA	0.5 A 30 VA 1.0 A 60 VA	0.5 A 30 VA 1.0 A 60 VA

Configuration example

Mechanical connection:	Flange ø 78
Material:	Aluminium
Material: tube ø 12 mm Max. length:	Stainless steel 2 m
Electrical connection:	Connection terminals
Switching contact:	Changeover contact
Maximum number of contacts:	Changeover contact 3
Switching power:	0.5 A 30 VA
Float:	1.4571 ø 44 x 45 mm



			
1.4571 ø 44 x 45 mm	1.4571 ø 52 mm	1.4571 ø 62 mm	1.4571 ø 84 mm


Miniature float switches					
Mechanical connection	R1/8"	R3/8"	PG7	R3/8" Connector	R1"
Material Connection head	Stainless steel Brass PP PVC	Stainless steel Brass PP PVC	Stainless steel Brass PP PVC	Stainless steel Brass PP PVC	Stainless steel PVC
Material Tube Ø 8 mm Max. length	Stainless steel 1 m Brass 1 m PP 41 mm PVC 500 mm	Stainless steel 1 m Brass 1 m PP 41 mm PVC 500 mm	Stainless steel 1 m Brass 1 m PP 41 mm PVC 500 mm	Stainless steel 1 m Brass 1 m PVC 500 mm	Stainless steel 1 m PVC 500 mm
Electrical connection	PVC cable SIL cable	PVC cableC SIL cable	PVC cable SIL cable	Connector M12x1	Terminal enclosure
Switching contact	NO contact NC contact Changeover contact	NC contact NO contact Changeover contact	NC contact NO contact Changeover contact	NC contact NO contact Changeover contact	NC contact NO contact Changeover contact
Maximum number of contacts	3 1 (PP)	3 1 (PP)	3 1 (PP)	NC contact 3 NO contact 3 Changeover contact 1	3
Switching power	0.5 A 10 VA 0.3 A 3 VA	0.5 A 10 VA 0.3 A 3 VA	0.5 A 10 VA 0.3 A 3 VA	0.5 A 10 VA 0.3 A 3 VA	0.5 A 10 VA 0.3 A 3 VA

Floats				
Material Dimensions	NBR Ø 17.3 x 25 mm	NBR Ø 20 x 20 mm	NBR Ø 23 x 25 mm	PVC Ø 25 x 21 mm
Floats				
Material Dimensions	PP Ø 25 x 21 mm	1.4571 Ø 29 x 25 mm	1.4571 Ø 30 mm	

See catalogue or go to www.bernstein.eu for enquiries and level switch order form.

Configuration example

Mechanical connection:	R3/8"
Material:	PP
Material: tube Ø 8 mm:	PP
Max. length:	41 mm
Electrical connection:	PVC cable
Switching contact:	Changeover contact
Maximum number of contacts:	1 (bei PP)
Switching power:	0.3 A 3 VA
Float:	PP Ø 25 x 21 mm

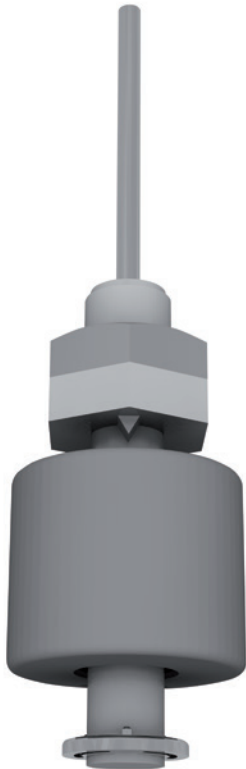


Extract from product range

Miniature float switches R1/8"

Type designation
MSK1-PP-R1/8-S 0040


Article number
6891411005

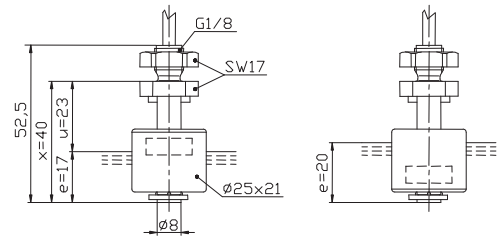

Miniature float switches PG7

Type designation
MSK1-PP-PG7-S


Article number
6891414002



Miniature float switches Horizontal installation



Type designation
MSKS-PA-FL36-OS

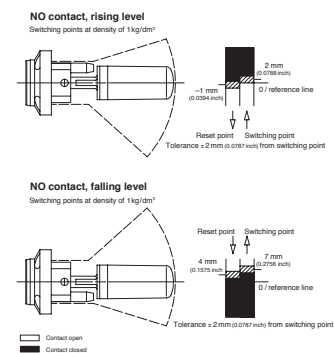

Article number
6891700002




Further options

- Elbow versions (except MS versions and 1")
- Separate contacts
- Switching point limited by adjustment rings
- Versions with several floats
- Integrated PT100/PT1000
- Heat resistant versions

Adjustable Float Switches			
Mechanical connection	R1.5"	R2"	Flange ø 120
Material Connection head	Stainless steel PVC	Stainless steel PVC	
Terminal enclosure	Aluminium PVC	Aluminium PVC	Aluminium
Tube material	ø 18 mm stainless steel ø 20 mm PVC	ø 18 mm stainless steel ø 20 mm PVC	ø 18 mm stainless steel ø 20 mm PVC ø 18 mm brass
Switching contact	NC/NO contact (bistable) Changeover contact	NC/NO contact (bistable) Changeover contact	NC/NO contact (bistable) Changeover contact
Tube length () Max. number of contacts NC/NO contact [] Max. number of contacts Changeover contact	250 mm (2) [2] 500 mm (3) [3] 750 mm (4) [3] 1000 mm (4) [3]	250 mm (2) [2] 500 mm (3) [3] 750 mm (4) [3] 1000 mm (4) [3]	250 mm (2) [2] 500 mm (3) [3] 750 mm (4) [3] 1000 mm (4) [3]
Switching power	5 A 250 VA 1 A 60 VA	5 A 250 VA 1 A 60 VA	5 A 250 VA 1 A 60 VA

Floats		
Material Dimensions	PVC ø 52 x 55 mm	1.4571 ø 52 x 55 mm

Switching modules	
For positioning on hole strip NC/NO contact (bistable) Changeover contact	

See catalogue or go to www.bernstein.eu for enquiries and level switch order form.

BERNSTEIN float switches

... safety you can rely on

- Reliable, contactless reed switching technology
- Extremely long service life
- Individual configuration at no extra cost
- Fast availability
- Available as from batch size 1
- Maintenance-free and non-wearing
- Fast installation and start-up

**Technical Hotline:
+49 571 793-493**

Reasons for choosing BERNSTEIN

Our sales markets throughout the world demand compliance with stringent safety requirements, configuration of customised applications and maximum efficiency.

Customer specifications test and refine our expertise. We accept challenges and grow with the solutions. We have been following this principle for more than 60 years.

Talk to us about your specific applications.



**Switch technology –
Economy meets safety**



**Sensor technology –
Compact intelligence**



**Enclosure technology –
Function and design**

www.bernstein.eu

Contact

**International Headquarters
BERNSTEIN AG**
Hans-Bernstein-Str. 1
32457 Porta Westfalica
Phone +49 571 793-0
Fax +49 571 793-555
info@de.bernstein.eu
www.bernstein.eu

**Denmark
BERNSTEIN A/S**
Phone +45 7020 0522
Fax +45 7020 0177
info@dk.bernstein.eu

**France
BERNSTEIN S.A.R.L.**
Phone +33 1 64 66 32 50
Fax +33 1 64 66 10 02
info@fr.bernstein.eu

**Italy
BERNSTEIN S.r.l.**
Phone +39 035 4549037
Fax +39 035 4549647
info@it.bernstein.eu

**United Kingdom
BERNSTEIN Ltd**
Phone +44 1922 744999
Fax +44 1922 457555
info@uk.bernstein.eu

**Austria
BERNSTEIN GmbH**
Phone +43 2256 62070-0
Fax +43 2256 62618
info@at.bernstein.eu

**Switzerland
BERNSTEIN (Schweiz) AG**
Phone +41 44 775 71-71
Fax +41 44 775 71-72
info@ch.bernstein.eu

**Hungary
BERNSTEIN Kft.**
Phone +36 1 4342295
Fax +36 1 4342299
info@hu.bernstein.eu

**China
BERNSTEIN Safe Solutions
(Taicang) Co., Ltd.**
Phone +86 512 81608180
Fax +86 512 81608181
info@bernstein-safesolutions.cn